



# High Performance Cylinders

A Complete Guide To  
Intense Cylinder &  
Pendant Lighting

MX

High Performance  
Pendants



Compatible With

Downlight  
Trims

High Performance

TIR  
Optics

Architectural

Deep  
Dimming

# MX 3.5" Aperture Architectural Pendants

Built on the powerful MX platform, these pendants provide elegant, architectural illumination and discreetly complement any space. Modular ingenuity transforms the expansive options and performance of the award-winning MX downlight into round and square pendants.

### Top Features

- Seamless design with no visible lines or hardware
- Field changeable optics, drivers and LED engines
- Unique flush surface mount with quarter turn adjustment for precise alignment


### Dimming Options

- Forward / Reverse Phase
- 0-10V at 1%
- eldoLED 0-10V at 0.1% or 1%
- Lutron EcoSystem at 1%
- Lutron Hi-Lume at 1%
- DMX512 RDM at 0.1%


### Mounting Types

- Cable: 24", 48" & 96" Cable Lengths
- Pendant: 12", 18", 24", 36" & 48" Lengths
- Surface Mount


### Electrical Data (Based on Round Aperture)




### Aperture Types




### Height Options

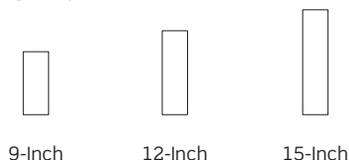

### Mounting Options

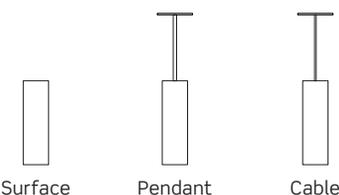


### Pendant Finishes





### Trim Finishes



### Field Changeable Optics

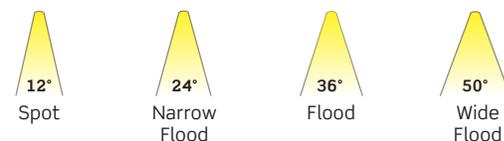

### Color Reliability

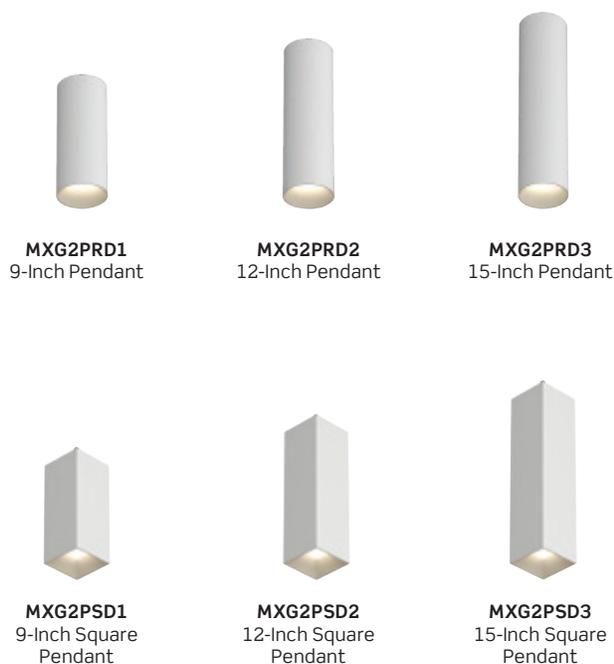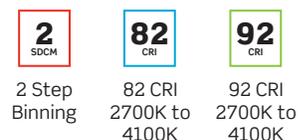

# Gravity™

High Power  
Architectural  
Cylinders



Delivering Up To

7000  
Lumens

High Performance

Field Changeable  
Optics

Architectural

Deep  
Dimming

# Gravity High Power Architectural Cylinders

Gravity cylinders are beautifully designed high performance LED downlights that offer a dynamic solution for high output illumination. Designed for use in a variety of architectural applications, Gravity cylinders provide uniform light distribution in a variety of environments from 10' corridors to 100' ceilings.

## Top Features

- High output single point source LED
- Field changeable optics, drivers and LED engines
- Tunable White and Warm Dim options available

## Dimming Options

- 0-10V at 1%
- eldoLED 0-10V at 0.1% or 1%
- Lutron EcoSystem at 1% or 5%
- Lutron Hi-Lume at 1%
- eldoLED DALI at 0.1% or 1%
- DMX512 RDM at 0.1%


## Mounting Types

- Aircraft Cable: 144" Cable Length
- Pendant: 12", 18", 24", 36", 48" & 96" Lengths
- Wall Mount
- Surface Mount


## Electrical Data (Based on 6" Aperture)

M1	950lm / 12W	79 lm/W
M2	1800lm / 12W	72 lm/W
L1	2500lm / 35W	71 lm/W
L2	3400lm / 48W	71 lm/W
L3	5000lm / 60W	83 lm/W
L4	6100lm / 75W	81 lm/W
L5	7000lm / 90W	78 lm/W


## Aperture Sizes

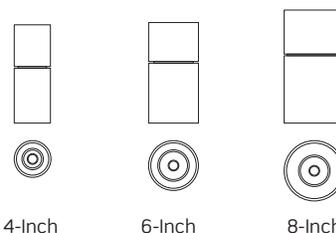

## Mounting Options

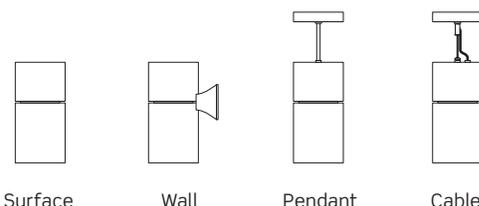


## Cylinder Finishes



## Trim Finishes



## Field Changeable Optics

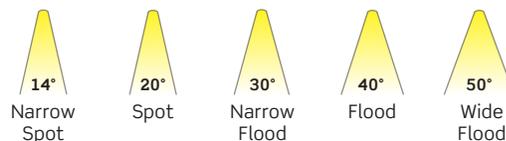

## Color Reliability

<b>2</b> SDCM	<b>3</b> SDCM	<b>82</b> CRI	<b>92</b> CRI
2 Step Binning 4-Inch	3 Step Binning 6 & 8-Inch	82 CRI 2700K to 4000K	92 CRI 2700K or 3000K



SS

General Illumination  
Cylinders



Delivering Up To

3000  
Lumens

Efficacy Up To

96 Lumens  
Per Watt

Standard

1% 0-10V  
Dimming

# SS General Illumination Cylinders

Designed on the popular SS downlighting series, SS cylinders set a new standard for efficiency and performance. Engineered for a variety of commercial environments, these cylinders provide unparalleled value for general illumination.

## Top Features

- High efficacy of up to 96 lm/W
- Deep regressed LED provides comfortable illumination
- Tunable White and Warm Dim options available

## Dimming Options

- Standard 0-10V at 1%
- eldoLED 0-10V at 0.1% or 1%
- Lutron EcoSystem at 1% or 5%
- Lutron Hi-Lume at 1%
- eldoLED DALI at 0.1% or 1%
- DMX512 RDM at 0.1%


## Mounting Types

- Aircraft Cable: 144" Cable Length
- Pendant: 12", 18", 24", 36", 48" & 96" Lengths
- Wall Mount
- Surface Mount


## Electrical Data (Based on 6" Aperture)

L1		1000lm / 13W	77 lm/W
L2		1500lm / 16W	94 lm/W
L3		2000lm / 21W	95 lm/W
L4		2500lm / 26W	96 lm/W
L5		3000lm / 32W	94 lm/W

## Aperture Sizes

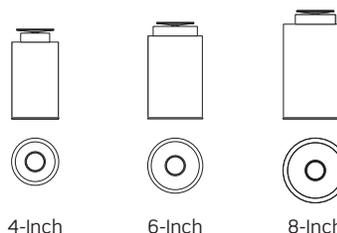

## Mounting Options

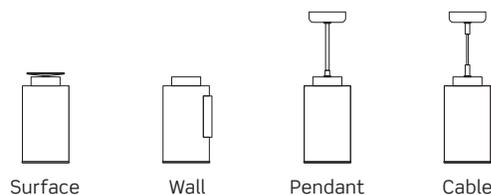

## Cylinder Finishes



## Trim Finishes



## Color Reliability



**Intense Lighting**

3340 E. La Palma Ave.  
Anaheim, CA 92806

**tel** 714 630-9877

**fax** 714 630-9883

[info@intenselighting.com](mailto:info@intenselighting.com)  
[www.intenselighting.com](http://www.intenselighting.com)

**A Leviton Company**

[www.leviton.com](http://www.leviton.com)

Printed in the U.S.A  
©2017. Intense Lighting, LLC. All Rights Reserved.

INT0317-CYL-1