

# SS4G4CREM

## 4" SS LED Cylinder Gen 4 with Remote Driver

<b>JOB NAME</b>		<b>CATALOG NUMBER</b>	
<b>NOTES</b>		<b>TYPE</b>	

### ELECTRICAL DATA

LED Light Engine	System Wattage *		CCT	Nominal Delivered Lumens **
	120-277V	347V		
L1	9W	9.7W	3500K	1000lm
L2	13W	14.5W	3500K	1500lm
L3	17W	19.5W	3500K	2000lm

\* System Wattage includes driver and LED Module consumption.

\*\* Delivered lumen output will vary depending on CCT selection.

### LED MODULE

- Powered by OSRAM High Performance LED Engine
- 50,000 hours at 70% lumen maintenance
- 80 CRI at 2700K, 3000K, 3500K, 4000K

### ELECTRICAL SYSTEM

- Universal voltage 120-277V when specified with Osram 0-10V 1%
- 347V available with Osram 0-10V 1% Dimming only
- 347V available, consult factory
- Power factor >.9, 50/60Hz
- eldoLED, Lutron and DMX Dimming must specify voltage

### DIMMING

- Osram 0-10V 1% Dimming (Compatible with 347V)
- Phase dimming available in 120V only
- EldoLED SOL0drive 0-10V 0.1%
- EldoLED ECOdrive 0-10V 1%
- Lutron® LDE1 Hi-Lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology
- Lutron® LTEA2W Hi-Lume 1% 2-Wire LED driver (120V forward phase only)

### FINISHES

Cylinder housings are available in standard, powder coated finishes including black, silver or white. Cylinders feature optional high quality clear specular, haze or white reflector. Consult factory for custom finishes and additional reflector options.

### MOUNTING

- Surface mount for direct installation to 3" or 4" octagon J-Box
- 144" Aircraft cable is supplied with complete canopy assembly. Aircraft cable is cuttable and can be modified in the field
- Wall mount bracket for installation to 4" octagon J-Box
- Pendant stems supplied with complete canopy assembly. Pendant stems are cuttable and can be modified in the field.

### EMERGENCY BACKUP

Remote test switch included. External battery operates LED load of up to 7W at a minimum of 400 lumens for 90 minutes (EM7).

### REMOTE DRIVER ENCLOSURE


- Galvanized steel construction
- 50ft remote distance maximum

### LISTING/WARRANTY




- ETL listed to US and Canadian standards for damp locations
- 5-Year Intense LED Limited Warranty




### Surface Mount




### Wall Mount



### Pendant Mount



### Aircraft Cable



Canopy can be mounted at a maximum angle of 45°

Example: SS4G4CREML3358-WW-P24

Cylinder	LED Module	CCT / CRI	Cylinder Finish	Reflector Finish	Mounting
SS4G4CREM	L1 (9 Watts)	278 (2700K / 80 CRI)	-W (White)	C (Clear)	-C144 (144" Aircraft Cable)
	L2 (13 Watts)	308 (3000K / 80 CRI)	-B (Black)	HZ (Haze)	-P12 (12" Pendant)
	L3 (17 Watts)	358 (3500K / 80 CRI)	-SV (Silver)	W (White)	-P24 (24" Pendant)
		408 (4000K / 80 CRI)			-P36' (36" Pendant) -P48 (48" Pendant) -P96' (96" Pendant) -WB (Wall Bracket) -S (Surface)

Example: REMSSG4C-ED10V1EM7

Power Box	LED Module	Dimming	Voltage	Emergency Options	
REMSSG4C	L1 (9 Watts)	blank (Osram 0-10V 1%)	blank (Universal 120/277V)	EM7 (7W Emergency Backup w/ Remote Test Switch <a href="#">IOTA part #ILB-CP07-A</a> )	
	L2 (13 Watts)	-DIM <sup>2,3</sup> (Phase Dimming)	34 <sup>6</sup> (347V)		
	L3 (17 Watts)	-ED10V01 (eldoLED 0-10V 1%)			
		-ED10V01 (eldoLED 0-10V 0.1%)			
		-LUT <sup>5</sup> (Lutron® LDE1 EcoSystem 1%)			
	-LUT5 <sup>4</sup> (Lutron® LDE5 EcoSystem 5%)				
	-LUT2 <sup>3,4</sup> (Lutron® LTEA2W 2-Wire 1%)				
	-DMXR <sup>5</sup> (DMX512 RDM 0.1%)				

### Notes:

- Special order. Note: 96" pendant is made with (2) 48" pendants w/ coupler. 36" Pendant is made with (1) 12" & 24" w/ coupler
- Not available in L1 or L2 package
- Not Available in 277V
- Lutron not available in L1
- DMX512 RDM not available in L1 & L2 and not available with pendant mount
- 347V only available with Osram 0-10V 1% Dimming
- EM20 is not available with L1, L2 & L3

CYLINDERS-SS LUM-020123 P-1

INTENSE LIGHTING | 3340 E La Palma Ave, Anaheim, CA 92806 | tel 714 630-9877 | fax 714 630-9883

For Intense Lighting's limited product warranty, go to [www.intenselighting.com](http://www.intenselighting.com). For a printed copy of the warranty, you may call 800 961-5321.


© 2023 Intense Lighting, LLC. All rights reserved. Note: This document is subject to change without notice.

# SS4G4CREM




4" SS LED Cylinder Gen 4 with Remote Driver

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	


## Surface Mount




## Wall Mount




## Pendant Mount




## Aircraft Cable



## Remote Driver Enclosure

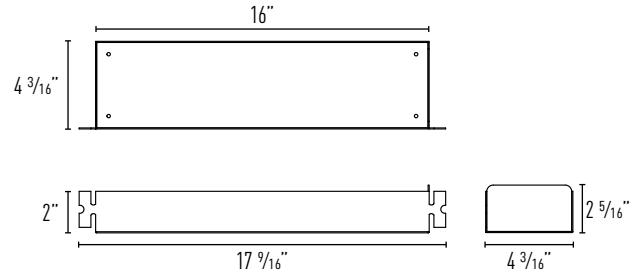

## Emergency Backup Battery

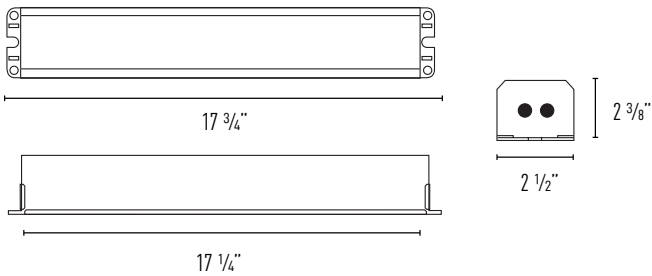

# SS4G4CREM

4" SS LED Cylinder Gen 4 with Remote Driver

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

## SS4G4CL1358-WC

Test Number: 20180614-7.008

Lumens: 1015.4lm

Watts: 8.6W

Efficacy: 118 lm/w

Distance to Floor (Feet)	Footcandles at Nadir	Beam Diameter (Feet)
6'	22.8fc	6' 6"
8'	12.8fc	8' 8"
10'	8.2fc	11'
12'	5.7fc	13' 2"

### Candela Distribution

Angle	Candela
0°	821
5°	828
15°	874
25°	834
35°	455
45°	50

### Zonal Lumen Summary

Zone	Lumens	%Fixture
0-30	703	69
0-40	963	95
0-60	1,013	100
60-90	3	.3
0-90	1,015	100

### L1 LED Module - CCT Multipliers:

2700K (x 1.00), 3000K (x 1.00), 3500K (x 1.00), 4000K (x 1.08)

## SS4G4CL3358-WC

Test Number: 20180614-7.010

Lumens: 2026.7lm

Watts: 17.2

Efficacy: 118 lm/w

Distance to Floor (Feet)	Footcandles at Nadir	Beam Diameter (Feet)
6'	45.5fc	6' 6"
8'	25.6fc	8' 8"
10'	16.4fc	11'
12'	11.4fc	13' 2"

### Candela Distribution

Angle	Candela
0°	1640
5°	1653
15°	1744
25°	1663
35°	847
45°	100

### Zonal Lumen Summary

Zone	Lumens	%Fixture
0-30	1,403	69
0-40	1,923	95
0-60	2,021	100
60-90	5.7	.3
0-90	2,026	100

### L3 LED Module - CCT Multipliers:

2700K (x 0.97), 3000K (x 0.97), 3500K (x 1.00), 4000K (x 1.03)

## SS4G4CL2358-WC

Test Number: 20180614-7.009

Lumens: 1521.1lm

Watts: 12.8W

Efficacy: 119 lm/w

Distance to Floor (Feet)	Footcandles at Nadir	Beam Diameter (Feet)
6'	34.2fc	6' 6"
8'	19.2fc	8' 8"
10'	12.3fc	11'
12'	8.55fc	13' 2"

### Candela Distribution

Angle	Candela
0°	123
5°	1241
15°	130
25°	1248
35°	636
45°	74

### Zonal Lumen Summary

Zone	Lumens	%Fixture
0-30	1,053	69
0-40	1,443	95
0-60	1,517	100
60-90	4	.3
0-90	1,521	100

### L2 LED Module - CCT Multipliers:

2700K (x 0.95), 3000K (x 0.97), 3500K (x 1.00), 4000K (x 1.03)